



KTC HARDWARE & TRADING SDN BHD (636146-X)
 Tel : +607-252 7037 Fax : +607-252 2037
 E-mail : sales@ktchardware.com
 Website: www.ktchardware.com



Digital Torque Screwdriver

SD-05CN	1/4" BIT	5 - 50 cN-m
SP-2BN		10 - 200 cN-m
SP-4BN		20 - 400 cN-m



Digital Mini Torque Wrench/with Bits

DM2-006CN	1/4"	0.3 - 6 N-m
DM2-012CN		0.6 - 12 N-m
DM2-020CN		1 - 20 N-m
DP3-060CN	3/8"	3 - 60 N-m
DP3-085CN		4.2 - 85 N-m
BM2-006CN	1/4" BIT	0.3 - 6 N-m
BM2-012CN		0.6 - 12 N-m
BM2-020CN		1 - 20 N-m



Digital Torque Wrench

DK4-135BN	1/2"	6.8 - 135 N-m
DK4-200BN		10 - 200 N-m
DK4-340BN		17 - 340 N-m
DK6-500BN	3/4"	25 - 500 N-m
DK6-850BN		42.5 - 850 N-m
IP8-1500BN	1"	300 - 1500 N-m
IP8-2000BN		400 - 2000 N-m



Digital Torque Wrench - Interchangeable

DKC2-030BN	1/4"	1.5 - 30 N-m
DKC4-135BN	1/2"	6.8 - 135 N-m
DKC4-200BN		10 - 200 N-m
DKC4-340BN		17 - 340 N-m



Inserts available from
 7 - 19mm
 13 - 41mm




Digital Torque Angle Adapter

Model	AM-BN
Angle Accuracy	±1° for 90° rotation @ 30°/sec
Target Range	1 - 360.0° (increment 1°)
Resolution	1°

Digital Torque Screwdriver

Made In Taiwan

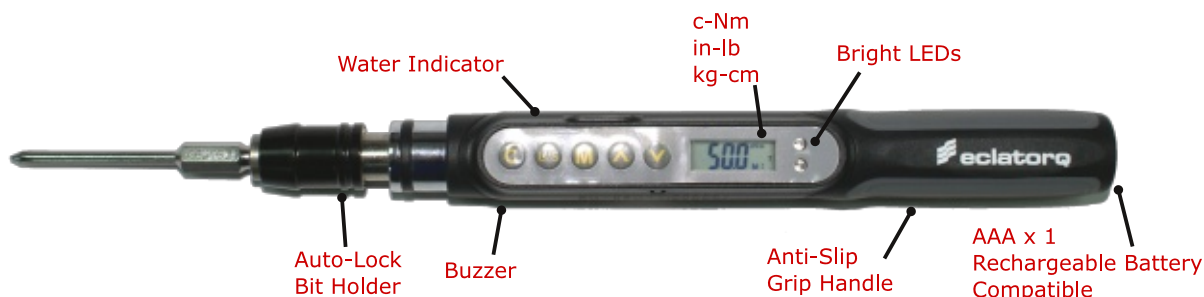

Code	3TEQSD05CN	3TEQSP02BN	3TEQSP04BN
Model	SD-05CN	SP-2BN	SP-4BN
Accuracy	CW:±3% CCW:±4%	CW:±2.5% CCW:±3.5%	
Bit End Fitting (inch)	1/4		
Length (mm)	193/203		
Max Operation Range	50 cN-m 4.42 in-lb 5.1 kg-cm	200 cN-m 17.7 in-lb 20.41 kg-cm	400 cN-m 35.39 in-lb 40.82 kg-cm
Measured Torque	5 - 50 cN-m 0.44 - 4.42 in-lb 0.51 - 5.1 kg-cm	10 - 200 cN-m 0.88 - 17.7 in-lb 1.02 - 20.41 kg-cm	20 - 400 cN-m 1.77 - 35.39 in-lb 2.04 - 40.82 kg-cm
Resolution	0.1 cN-m / 0.01 in-lb / 0.01 kg-cm		
Data Memory Size	50		
PC Connectivity	No		
Button	5		
Number of Presets	9		
Bright LEDs	2 LED (1 Red + 1 Green)		
Operation Mode	Peak Hold/Track		
Unit Selection	cN-m, in-lb, kg-cm		
Head Type	Autolock bit holder		
Battery	AAA x 1		
Battery Life	12 hours (Continuous Operations) / 1year (Standby)		
Temperature	-10°C - 60°C (Operating Temp) / -20°C - 70°C (Storage Temp)		
Humidity	Up to 90% non-condensing		
Drop Test	1M		
Vibration Test	10G		
Life Time	10,000 cycle		
Environmental Test	Pass		
Electromagnetic Compatibility Test	Pass		

Accuracy is guaranteed from 20% to 100% full scale.

Mini Digital Torque Wrench

Made In Taiwan




Code	3TEQDM2006CN	3TEQDM2012CN	3TEQDM2020CN	3TEQDP3060CN	3TEQDP3085CN
Model	DM2-006CN	DM2-012CN	DM2-020CN	DP3-060CN	DP3-085CN
Accuracy	CW:±3% CCW:±4%				
Square Drive (inch)	1/4			3/8	
Length (mm)	207/216			290	
Max Operation Range	6 N-m 4.424 ft-lb 53.09 in-lb 61.22 kg-cm	12 N-m 8.85 ft-lb 106.2 in-lb 122.4 kg-cm	20 N-m 14.75 ft-lb 177.0 in-lb 204.1 kg-cm	60 N-m 44.24 ft-lb 530.9 in-lb 612.2 kg-cm	85 N-m 62.7 ft-lb 725 in-lb 867 kg-cm
Measured Torque	0.3 - 6 N-m 0.221 - 4.424 ft-lb 2.65 - 53.09 in-lb 3.06 - 61.22kg-cm	0.6 - 12 N-m 0.44 - 8.85 ft-lb 5.3 - 106.2 in-lb 6.1 - 122.4 kg-cm	1 - 20 N-m 0.74 - 14.75 ft-lb 8.8 - 177.0 in-lb 10.2 - 204.1 kg-cm	3 - 60 N-m 2.21 - 44.24 ft-lb 265 - 530.9 in-lb 30.6 - 612.2 kg-cm	4.2 - 85 N-m 3.1 - 62.7 ft-lb 37 - 725 in-lb 43 - 867 kg-cm
Resolution	0.001 N-m 0.01 ft-lb 0.01 in-lb 0.01 kg-cm	0.01 N-m 0.01 ft-lb 0.1 in-lb 0.1 kg-cm	0.01 N-m 0.01 ft-lb 0.1 in-lb 0.1kg-cm	0.1 N-m 0.1 ft-lb 1 in-lb 1 kg-cm	0.1 N-m 0.1 ft-lb 1 in-lb 1 kg-cm
Data Memory Size	50				
PC Connectivity	No				
Button	5				
Number of Presets	9				
Bright LEDs	2 LED (1 Red + 1 Green)				
Operation Mode	Peak Hold/Track				
Unit Selection	N-m, ft-lb, in-lb, kg-cm				
Head Type	Lever Type Ratchet (60 Gear Teeth)				
Battery	AAA x 1				
Battery Life	12 hours (Continuous Operations) / 1year (Standby)				
Temperature	-10°C - 60°C (Operating Temp) / -20°C - 70°C (Storage Temp)				
Humidity	Up to 90% non-condensing				
Drop Test	1M				
Vibration Test	10G				
Life Time	10,000 cycle				
Environmental Test	Pass				
Electromagnetic Compatibility Test	Pass				

Accuracy is guaranteed from 20% to 100% full scale.

Mini Digital Torque Wrench with Bits

Made In Taiwan

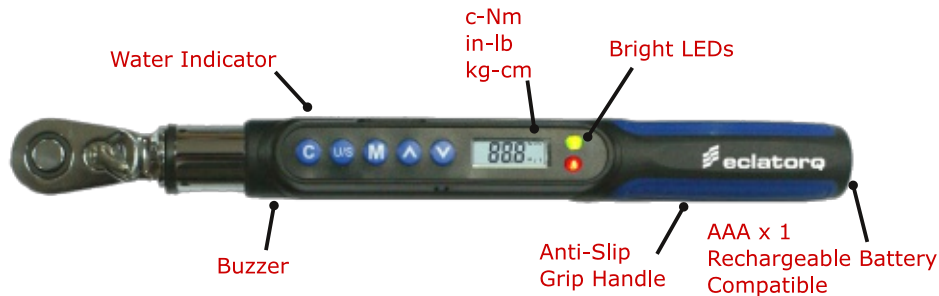

Code	3TEQBM2006CN	3TEQBM2012CN	3TEQBM2020CN
Model	BM2-006CN	BM2-012CN	BM2-020CN
Accuracy	CW:±3% CCW:±4%		
Bit End Fitting (inch)	1/4		
Length (mm)	207/216		
Max Operation Range	6 N-m 4.424 ft-lb 53.09 in-lb 61.22 kg-cm	12 N-m 8.85 ft-lb 106.2 in-lb 122.4 kg-cm	20 N-m 14.75 ft-lb 177.0 in-lb 204.1 kg-cm
Measured Torque	0.3 - 6 N-m 0.221 - 4.424 ft-lb 2.65 - 53.09 in-lb 3.06 - 61.22kg-cm	0.6 - 12 N-m 0.44 - 8.85 ft-lb 5.3 - 106.2 in-lb 6.1 - 122.4 kg-cm	1 - 20 N-m 0.74 - 14.75 ft-lb 8.8 - 177.0 in-lb 10.2 - 204.1 kg-cm
Resolution	0.001 N-m 0.01 ft-lb 0.01 in-lb 0.01 kg-cm	0.1 N-m 0.01 ft-lb 0.1 in-lb 0.1 kg-cm	0.01 N-m 0.01 ft-lb 0.1 in-lb 0.1kg-cm
Data Memory Size	50		
PC Connectivity	No		
Button	5		
Number of Presets	9		
Bright LEDs	2 LED (1 Red + 1 Green)		
Operation Mode	Peak Hold/Track		
Unit Selection	N-m, ft-lb, in-lb, kg-cm		
Head Type	Lever Type Ratchet (60 Gear Teeth)		
Battery	AAA x 1		
Battery Life	12 hours (Continuous Operations) / 1year (Standby)		
Temperature	-10°C - 60°C (Operating Temp) / -20°C - 70°C (Storage Temp)		
Humidity	Up to 90% non-condensing		
Drop Test	1M		
Vibration Test	10G		
Life Time	10,000 cycle		
Environmental Test	Pass		
Electromagnetic Compatibility Test	Pass		

Accuracy is guaranteed from 20% to 100% full scale.

Digital Torque Wrench

Made In Taiwan



Front View



12 LEDs around the screen
 Preset Number
 Peak hold / Track
 Power On/ Reset

Buzzer



Side View

Code	3TEQDK4135BN	3TEQDK4200BN	3TEQDK4340BN	3TEQDK6500BN	3TEQDK6850BN
Model	DK4-135BN	DK4-200BN	DK4-340BN	DK6-500BN	DK6-850BN
Accuracy	CW:±2% CCW:±3%			CW:±2.5% CCW:±3.5%	
Square Drive (inch)	1/2			3/4	
Length (mm)	415	530	650	950	1220
Max Operation Range	135 N-m 99.5 ft-lb 1195 in-lb 1378 kg-cm	200 N-m 147.5 ft-lb 1770 in-lb 2041 kg-cm	340 N-m 250.7 ft-lb 3009 in-lb 3469 kg-cm	500 N-m 368.7 ft-lb 4424 in-lb 5102 kg-cm	850 N-m 626.8 ft-lb 7521 in-lb 8674 kg-cm
Measured Torque	6.8 - 135 N-m 5 - 99.5 ft-lb 60 - 1195 in-lb 69 - 1378 kg-cm	10 - 200 N-m 7.4 - 147.5 ft-lb 88 - 1770 in-lb 102 - 2041 kg-cm	17 - 340 N-m 12.5 - 250.5 ft-lb 150 - 3009 in-lb 173 - 3469 kg-cm	25 - 500 N-m 18.4 - 368.7 ft-lb 221 - 4424 in-lb 255 - 5102 kg-cm	42.5 - 850 N-m 31.3 - 626.8 ft-lb 376 - 7521 in-lb 434 - 8674 kg-cm
Resolution	0.1 N-m / 0.1 ft-lb / 1 in-lb / 1 kg-cm				
Data Memory Size	50				
PC Connectivity	No				
Button	5				
Number of Presets	9				
Bright LEDs	12 LED (2 Red + 10 Green)				
Operation Mode	Peak Hold/Track				
Unit Selection	N-m, ft-lb, in-lb, kg-cm				
Head Type	Lever Type Ratchet (36 Gear Teeth)			Lever Type Ratchet (48 Gear Teeth)	
Battery	AA x 2				
Battery Life	110 hours (Continuous Operations) / 1year (Standby)				
Temperature	-10°C - 60°C (Operating Temp) / -20°C - 70°C (Storage Temp)				
Humidity	Up to 90% non-condensing				
Drop Test	1M				
Vibration Test	10G				
Life Time	10,000 cycle				
Environmental Test	Pass				
Electromagnetic Compatibility Test	Pass				

Accuracy is guaranteed from 20% to 100% full scale.

Digital Torque Wrench


Made In Taiwan



Code	3TEQIP81500BN	3TEQIP82000BN
Model	IP8-1500BN	IP8-2000BN
Accuracy	CW:±2.5% CCW:±3.5%	
Square Drive (inch)	1"	
Length (mm)	1800	1800
Max Operation Range	1500 N-m 1106 ft-lb	2000 N-m 1476 ft-lb
Measured Torque	300 - 1500 N-m 221 - 1106 ft-lb	400 - 2000 N-m 295 - 1476 ft-lb
Resolution	1 N-m / 1 ft-lb	
Data Memory Size	50	
PC Connectivity	No	
Button	5	
Number of Presets	9	
Bright LEDs	12 LED (2 Red + 10 Green)	
Operation Mode	Peak Hold/Track	
Unit Selection	N-m, ft-lb	
Head Type	Lever Type Ratchet (48 Gear Teeth)	
Battery	AA x 2	
Battery Life	110 hours (Continuous Operations) / 1year (Standby)	
Temperature	-10°C - 60°C (Operating Temp) / -20°C - 70°C (Storage Temp)	
Humidity	Up to 90% non-condensing	
Drop Test	1M	
Vibration Test	10G	
Life Time	10,000 cycle	
Environmental Test	Pass	
Electromagnetic Compatibility Test	Pass	

Digital Torque Wrench - Interchangeable Head


Made In Taiwan

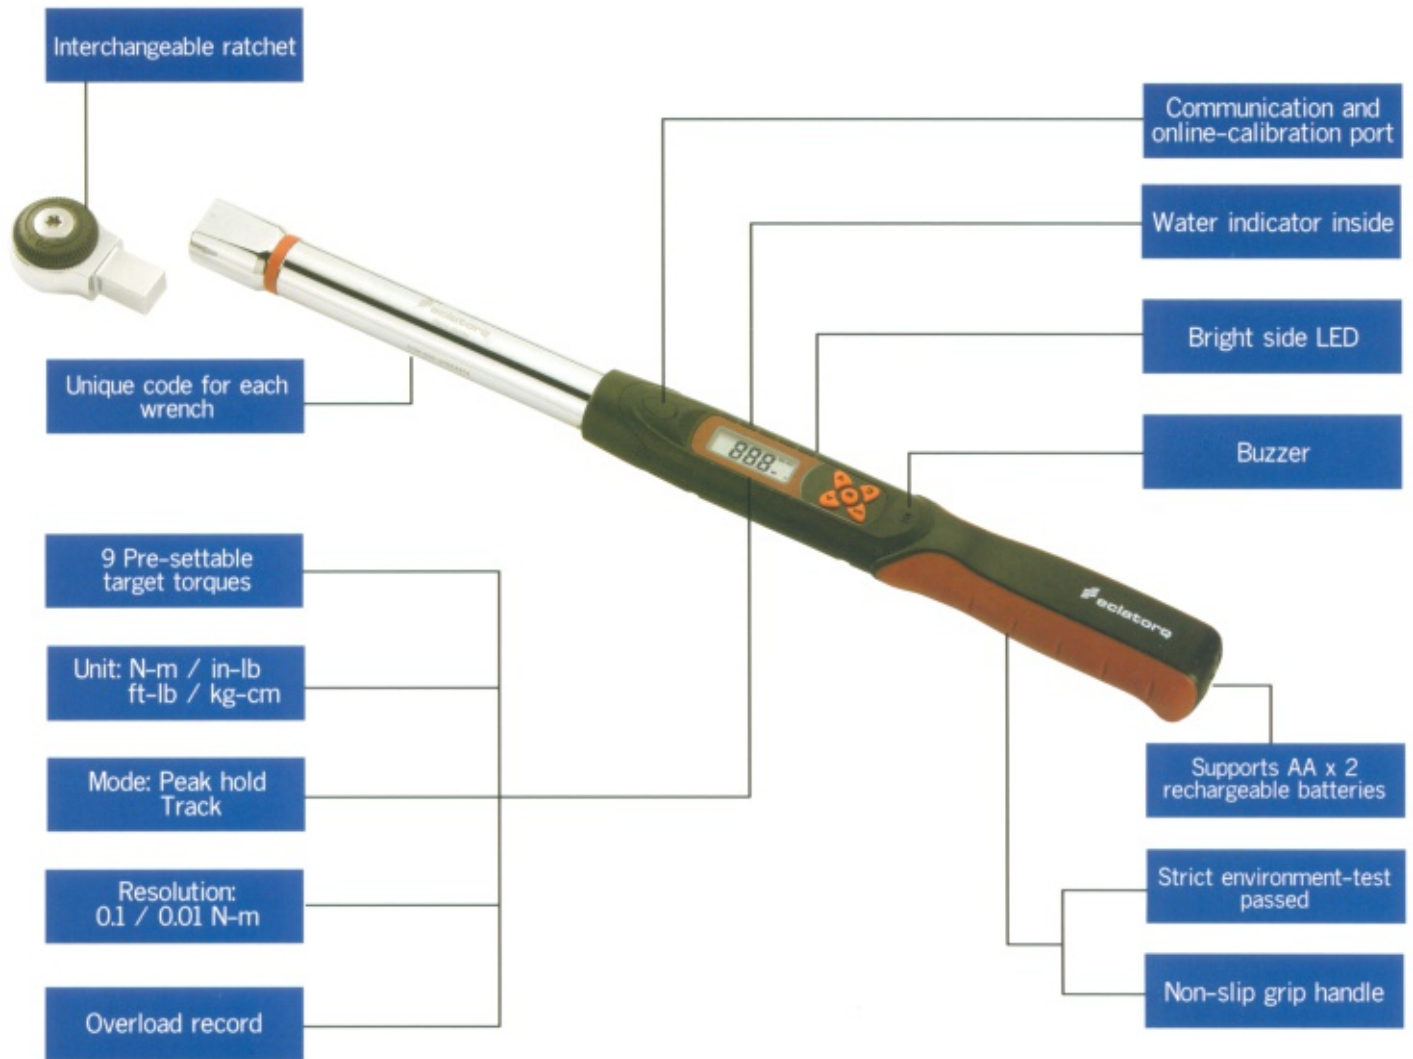

Precise. Intelligent. Reliable.

Digital Torque Wrench - Interchangeable Head

Made In Taiwan

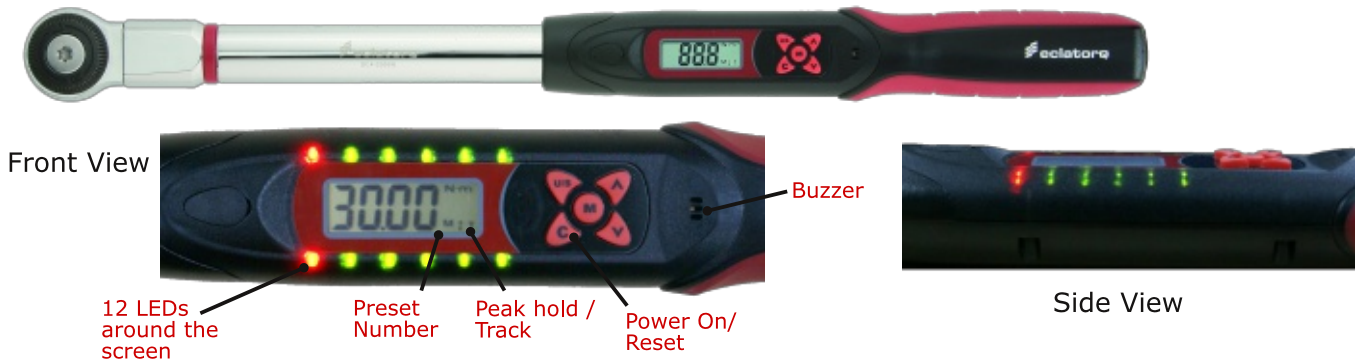


Code	3TEQDKC2030BN	3TEQDKC4135BN	3TEQDKC4200BN	3TEQDKC4340BN
Model	DKC2-030BN	DKC4-135BN	DKC4-200BN	DKC4-340BN
Accuracy	CW:±2% CCW:±3%			
Square Drive (inch)	1/4	1/2		
Length (mm)	390	415	530	650
Max Operation Range	30 N-m 22.12 ft-lb 265.5 in-lb 306.1 kg-cm	135 N-m 99.5 ft-lb 1195 in-lb 1378 kg-cm	200 N-m 147.5 ft-lb 1770 in-lb 2041 kg-cm	340 N-m 250.7 ft-lb 3009 in-lb 3469 kg-cm
Measured Torque	1.5 - 30 N-m 1.11 - 22.12 ft-lb 13.3 - 265.5 in-lb 15.3 - 306.1 kg-cm	6.8 - 135 N-m 5 - 99.5 ft-lb 60 - 1195 in-lb 69 - 1378 kg-cm	10 - 200 N-m 7.4 - 147.5 ft-lb 88 - 1770 in-lb 102 - 2041 kg-cm	17 - 340 N-m 12.5 - 250.5 ft-lb 150 - 3009 in-lb 173 - 3469 kg-cm
Resolution	00.1 N-m / 00.1 ft-lb / 0.1 in-lb / 0.1 kg-cm	0.1 N-m / 0.1 ft-lb / 1 in-lb / 1 kg-cm		
Data Memory Size	50			
PC Connectivity	No			
Button	5			
Number of Presets	9			
Bright LEDs	12 LED (2 Red + 10 Green)			
Operation Mode	Peak Hold/Track			
Unit Selection	N-m, ft-lb, in-lb, kg-cm			
Head Type	Lever Type Ratchet (36 Gear Teeth) Interchangeable Head (12 x 9)			Lever Type Ratchet (48 Gear Teeth) Interchangeable Head (18 x 14)
Battery	AA x 2			
Battery Life	110 hours (Continuous Operations) / 1year (Standby)			
Temperature	-10°C - 60°C (Operating Temp) / -20°C - 70°C (Storage Temp)			
Humidity	Up to 90% non-condensing			
Drop Test	1M			
Vibration Test	10G			
Life Time	10,000 cycle			
Environmental Test	Pass			
Electromagnetic Compatibility Test	Pass			

Accuracy is guaranteed from 20% to 100% full scale.

Interchangeable Head - Inserts

Made In Taiwan



Open Jaw Inserts EQO0912 (9mm x 12mm) Suitable for DKC4-135BN

Size	W (mm)	H (mm)	C (mm)
7mm	20.7	5.7	17.5
8mm	22	5.7	17.5
9mm	23.5	5.7	17.5
10mm	24.8	5.7	17.5
11mm	26	5.7	17.5
12mm	27.5	5.7	17.5
13mm	28.8	5.7	17.5
14mm	31.5	7.7	20
15mm	33.5	7.7	20
16mm	36	7.7	20
17mm	37.7	7.7	20
18mm	39	7.7	20
19mm	40.7	7.7	20



Open Jaw Inserts EQO1418 (14mm x 18mm) Suitable for DKC4-200BN

Size	W (mm)	H (mm)	C (mm)
13mm	29.7	7	25
14mm	31.1	7	25
15mm	33.4	7	25
16mm	35.8	9	25
17mm	37	9	25
18mm	38.6	9	25
19mm	40.6	9	25
21mm	45.2	11	25
22mm	47.3	11	25
24mm	50.8	11	25
27mm	58.7	14	32.5
30mm	62.7	14	32.5
32mm	65.2	14	32.5
34mm	66.5	14	32.5
36mm	66.5	14	32.5
38mm	66.5	14	32.5
41mm	82.5	14	40

Adjustable Wrench Inserts EQOA0912 (9mm x 12mm) Suitable for DKC4-135BN

Size	Max Opening (mm)
8"	27

Adjustable Wrench Inserts EQOA1418 (14mm x 18mm) Suitable for DKC4-200BN

Size	Max Opening (mm)
10"	30
12"	41

Digital Angle Torque Adaptor

Made In Taiwan



Code	3TEQAMBN0000
Model	AM-BN
Angle Accuracy	±1° for 90° rotation @ 30°/sec
Size (L x W x H)	58mm x 58mm x 41mm
Display Range	0 - 999.0°
Target Range	1 - 360.0° (increment 1°)
Resolution	1°
Data Memory Size	50
PC Connectivity	No
Button	5
Number of Presets	9
Bright LEDs	6 LED (1 Red + 5 Green)
Unit Selection	degree
Battery	AAA x 2
Battery Life	24 hours (Continuous Operations) / 1year (Standby)
Temperature	-10°C - 60°C (Operating Temp) / -20°C - 70°C (Storage Temp)
Humidity	Up to 90% non-condensing
Drop Test	1M
Vibration Test	10G
Life Time	10,000 cycle
Environmental Test	Pass
Electromagnetic Compatibility Test	Pass